




High Performance Desktop Thermal Solution

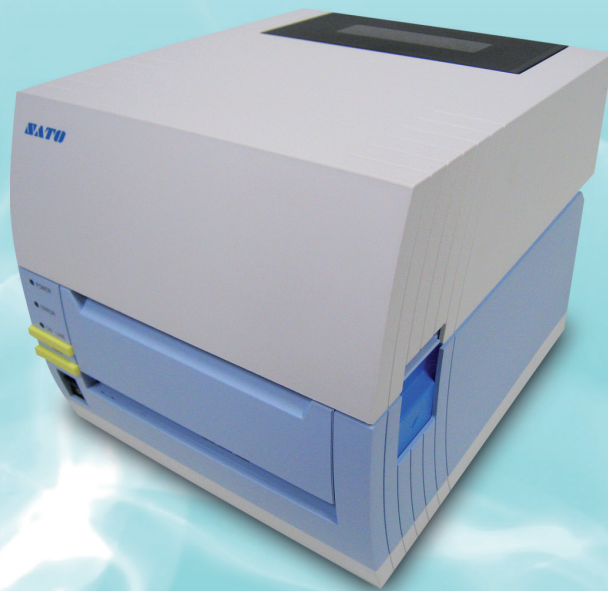

CT4i Series

INDUSTRY VERTICALS

- Healthcare
- Retail
- Logistics

APPLICATIONS

- Asset Labelling
- Compliance Labelling
- Pharmacy Labelling
- Wristband Printing
- Retail Marking
- Shipping/Receiving Labelling
- Gaming/Ticketing
- Hospitality Printing

Superior Print Quality at 600dpi ◀

Bluetooth Feature ◀

Wireless LAN ◀

Anti-microbial ◀

*The only desktop printer with internal
802.11g interface* ◀



General Specifications

CT4i



PRINTER MODEL		CT408i	CT412i	CT424i
PRINTING SPECIFICATIONS				
Print Method		Direct Thermal/Thermal Transfer		
Print Resolution		8 dots/mm (203dpi)	12 dots/mm (305dpi)	23.6 dots/mm (600dpi)
Max Print Speed		150mm/sec (6ips)	102mm/sec (4ips)	76mm/sec (3ips)
Max Print Area		Max (W x P): 104 x 400 mm, (4.10" x 15.76")		
MEDIA SPECIFICATIONS				
Sensor Type		Transmissive sensor for gap, Reflective sensor for I-mark		
Media Type		Label thickness (label + backing liner): 0.08 to 0.19 mm (0.003 to 0.007")		
Media Size		Width: 25 to 115mm (0.99" to 4.53"), inclusive backing paper size 28 to 118 mm (1.10" to 4.65") Pitch: 15 to 397mm (0.59" to 15.64"), inclusive backing paper size 18 to 400mm (0.71" to 15.76")		
Media		Roll stock: Max outside diameter 110mm (4.33"), Wound Face-out Inner diameter of roll: 40mm (1.58") Fan Fold Paper: Maximum Stack Height 100mm (3.94")		
CONSUMABLES SPECIFICATIONS				
Ribbon Size	Width	Max: 111mm (4.37")		
	Length	Max Roll: 100m		
	Winding Direction	Face-out		
	Internal Diameter	12.7mm (0.5")		
MEMORY/PROCESSING				
Main Memory		Flash memory 4MB		
Optional Memory		SDRAM 16MB		
CPU		32 bit RISC		
COMMUNICATION INTERFACES				
Standard Interface		RS232C + USB2.0 or LAN + USB2.0		
Optional Plug-in Interface Cards*		IEEE 802.11g (Inc LAN), Bluetooth, IEEE1284 *RS232C + USB2.0 model only		
FONTS/BARCODE SYMBOLOGIES				
Internal Fonts		XU 5x9 dots, XS 17x17 dots, XM 24x24 dots, XB 48x48 dots, XL 48x48 dots OCR-A 15x22 dots OCR-B 20x24 dots		
		OCR-A 22x33 dots OCR-B 30x36 dots	OCR-A 44x46 dots OCR-B 60x72 dots	
Barcodes	1D Barcode	UPC-A/E, EAN, CODABAR, CODE 39, CODE 93, CODE 128, UCC/EAN 128, Inter-leaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, MSI, Postnet, Bookland, EAN/UCC symbol		
	2D Barcode	QRCode, PDF 417, MaxiCode, Data Matrix		
	Character Rotation	0°, 90°, 180°, 270° rotation		
OPERATING & ENVIRONMENTAL				
Power Consumption		90 W (at 100 Vac)		
Power Supply		Rated Voltage: 100 Vac – 240 Vac +/- 10% Rated Current: 1.5A Output Voltage: 25Vdc Output Current: 2 A (current peak: 13A) Frequency: 50/60 Hz		
Environment		Operating Environment: 5 to 35°C / 30 to 80% RH (with no condensation) Storage Environment: -5 to 60°C / 30 to 90% RH (with no condensation)		
Dimensions		(W x D x H): 198 x 255 x 181 mm (7.80" x 10.05" x 7.13")		
Weight		3.0kg (excluding AC-Adapter)		
Antibacterial Finishing		Conforms to JISZ2801		
Regulatory		Noise: Emission - FCC, EN55022 Class B Safety : CE, C-UL, TUV, CCC, MIC HF: EN61000-3-2		
Safety Standards		UL, CSA, CCC, CE, FCC Class B, MIC, TÜV		
ACCESSORIES & OPTIONS				
Options		Cutter, Dispenser, Linerless, RFID		

OUR PRESENCE IN ASIA PACIFIC

HEADQUARTERS

SATO Corporation
1-7-1 Shimomeguro, Meguro-ku, Tokyo
153-0064, Japan
TEL: +81 3 6665 0600
www.satoworldwide.com

OFFICES

Australia
SATO Australia Pty Ltd
TEL: +61 3 8814 5330
www.satoaustralia.com

SATO Vicinity Pty Ltd
TEL: +61 2 9562 9800
www.satovicinity.com

China (PRC)

SATO Shanghai Co. Ltd
TEL: +86 21 3252 2777
www.satochina.com

India

SATO Auto-ID India Private Limited
TEL: +91 124 4498555
www.satoindia.com

Indonesia

PT. SATO Nagatomi
TEL: +62 21 652 2752
www.satonagatomi.com

Malaysia

SATO Auto-ID Malaysia Sdn Bhd
TEL: +60 3 7620 8901
malaysia.satoworldwide.com

New Zealand

SATO New Zealand Ltd
TEL: +64 9 477 2222
www.satoneozeland.com

Singapore

SATO Asia Pacific Pte Ltd
TEL: +65 6271 5300
www.satoasiapacific.com/singapore

Thailand

SATO Auto-ID (Thailand) Co., Ltd
TEL: +66 2 736 4460
www.satothailand.co.th

Vietnam

SATO Vietnam Solutions Co. Ltd
TEL: +84-08-3910 1350/1
www.satovietnam.com

REPRESENTATIVE OFFICES

Korea
SATO Asia Pacific Pte Ltd
Korea Representative Office
TEL: +82 2 761 5072
www.satokorea.com

Philippines

SATO Asia Pacific Pte Ltd
Philippines Representative Office
TEL: +63 2 464 7118
www.satoasiapacific.com

For more information about SATO in the region, visit www.satoasiapacific.com

©2015 SATO Holdings Corporation. All rights reserved.

Specifications subject to change without notice. Any unauthorized reproduction of the contents of this presentation, in part or whole, is strictly prohibited. SATO is a registered trademark of SATO HOLDINGS CORPORATION and its subsidiaries in Japan, the U.S. and other countries. All other trademarks are the property of their respective owners.